


Voltage Transducer CV 3-1500

$$V_{PN} = 1000 \text{ V}$$

For the electronic measurement of voltages : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high voltage) and the secondary circuit (electronic circuit).



Electrical data

V_{PN}	Primary nominal r.m.s. voltage	1000	V
V_p	Primary voltage, measuring range	0 .. ± 1500	V
V_s	Secondary analog voltage @ $V_{p \max}$	10	V
K_N	Conversion ratio	1500 V / 10 V	
R_L	Load resistance	≥ 1	k Ω
C_L	Capacitive loading	≤ 5	nF
V_C	Supply voltage ($\pm 5\%$)	± 15	V
I_C	Current consumption	$32 + V_s / R_L$	mA
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	6	kV
V_e	R.m.s. voltage for partial discharge extinction @ 10 pC	2	kV

Accuracy - Dynamic performance data

			Typ	Max	
X_G	Overall accuracy @ $V_{p \max}$	$T_A = 25^\circ\text{C}$ - $40^\circ\text{C} \dots + 85^\circ\text{C}$		± 0.2 ± 0.6	% %
V_O	Offset voltage @ $V_p = 0$	$T_A = 25^\circ\text{C}$ - $40^\circ\text{C} \dots + 85^\circ\text{C}$		± 5.0 ± 13.0	mV mV
t_r	Response time ¹⁾ @ 90 % of $V_{p \max}$		0.4		μs
dv/dt	dv/dt accurately followed		900		V/ μs
f	Frequency bandwidth (- 1 dB) @ 33 % of V_{PN}		DC .. 800		kHz

General data

T_A	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 45 .. + 90	$^\circ\text{C}$
P	Total primary power loss	2.8	W
R_1	Primary resistance	360	k Ω
m	Mass	560	g
	Standards	EN 50155	

Features

- Closed loop (compensated) voltage transducer
- Insulated plastic case recognized according to UL 94-V0
- Patent pending.

Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- Low response time
- High bandwidth
- High immunity to external interference
- Low disturbance in common mode.


Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications
- Railway overhead line voltage measurement.

Note : ¹⁾ With a dv/dt of 900 V/ μs

060809/8

Dimensions CV 3-1500 (in mm. 1 mm = 0.0394 inch)

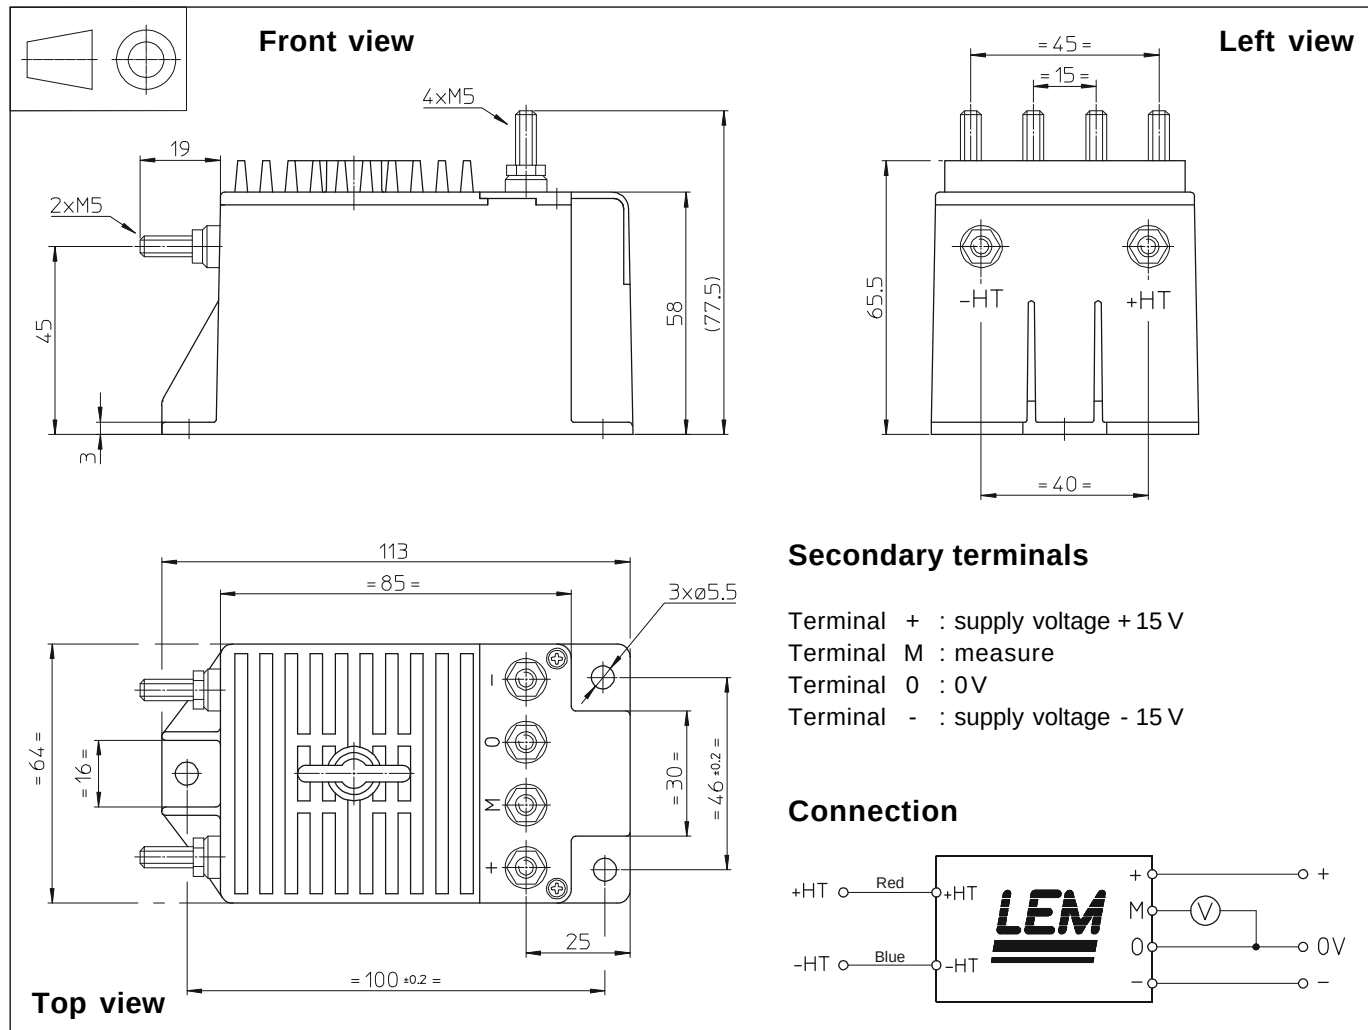

Mechanical characteristics

- General tolerance ± 0.3 mm
- Transducer fastening
 - 3 holes $\varnothing 5.5$ mm
 - 3 M5 steel screws
 - Fastening torque max 4 Nm or 2.95 Lb. - Ft.
- Connection of primary M5 threaded studs
- Connection of secondary M5 threaded studs
- Fastening torque max 2.2 Nm or 1.62 Lb. -Ft.

Remarks

- V_s is positive when V_p is applied on terminal +HT.
- CEM tested with a shielded secondary cable. Shield connected to 0 V at both ends, or disconnected.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.